

Introduction

Electromagnetic flow meter model ZT803 is designed for flow measurement of conductive liquids with no moving part and a PTFE lining. Electromagnetic flow meter is suitable for measurement of flow of conductive liquids, which is based on Faraday's law of Electromagnetic induction, according to which a voltage is induced in electrically conducting body moving in a magnetic field & this voltage is directly proportional to the velocity. Standard outputs include analog, frequency, RS232/RS485 or GSM/GPRS connectivity. Local and remote display models are available with weather proof & flame proof enclosure as an optional feature. They meet the most demanding requirements on high measurement precision, long-term stability and hygienic standard.

Features

Display	: Graphical Display 64*128
High Accuracy	: Up to 0.5% accuracy (Standard 1% Accuracy)
Wide Flow range	: Diameter from 15mm to 600mm
Resolution	: 5 digits Flowrate, Totalizer: 10 digits Totalizer
Electrode Material	: Various electrode materials available
End Connection Types	: Various Connections Available
Application	: All Conductive liquids having conductivity >20u/cm
Flow measure (Range)	: 0.3m/s minimum to 10m/s maximum (Velocity)

Electronics Parameters

Flowrate	: 5Digit and Auto Adjust With Line Size
Flow Totalizer	: 10digit Totalizer Value
Real Time Clock	: Available
Bargraph	: Corresponds to 0-100% Flowrate
Tag Id	: User Configure Id (Numeric)
Velocity	: 5Digit Velocity 0.000 M/s to 10.000 M/s

Configuration Functions/Parameters


Configuration Data	: 4 Tactile Membrane Keys for Data Configuration
Flow Totalizer Reset	: Totalizer Reset Facility by Password Protection
Unit	: Gallon, Liter, M3, Cubic Feet (User Configurable)
Low Cut-Off	: User Configurable
Flow Direction	: Software Selection for Forward/Reverse Flow Direction
Flow Indication	: Reverse/Forward Flow Indication with Sign Indication
Damping Time	: User Configurable

Alarm Indication and Detections

Flow Detection	: Empty Pipe Detection
Flow Indication	: Forward /Reverse
Alarm Indication	: Flow Alarm , Batch , Communication Status

Sensor Description (Mechanical Parts)

Lining Material	: PTFE
Electrode Material	: SS316 (Default), Hastalloy C, Tantalum, Titanium
Measuring Tube Material	: SS304 (Default), SS316
Coil Housing	: SS304 (Default)
End Connection	: Flange , Tri Clover , SMS Connection
Protection Class	: IP65 (Standard), IP68 (Optional)

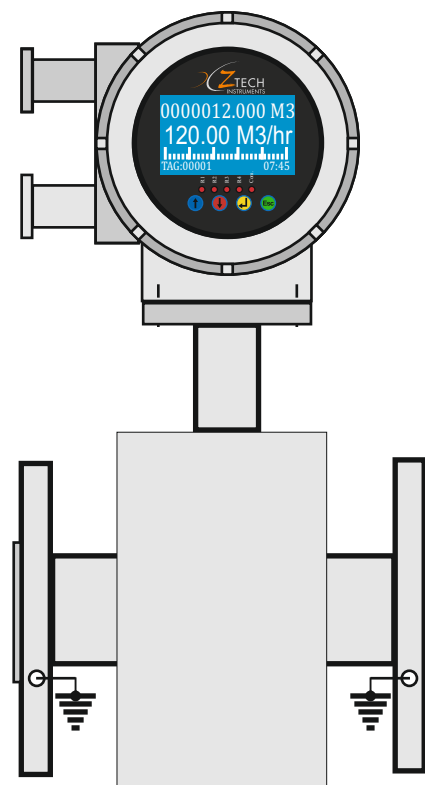

Electromagnetic Flowmeter

Output

Retransmission	: 4-20mA (Opto & Galvanic Isolated)
Control Alarm	: Max 2 Relay on Flow Rate
Batch Control Relay	: Control Relay on Totalizer for Batching Function
Pulse Output (Open Collector)	: Pulse Corresponds To Totalizer Quantity
Communications	: RS 485
Compatible with GPRS /GPS	: Yes

Special Function (Optional)

Batching Facility	: Available
Data Logging	: Internal Data Logging Function
Log Data	: Approx. 15000 Reading (Flow Data)
Data Printing	: External Data Printing Function

Security	: Password Protection for Configuration of Data
-----------------	---

Power Supply	: 90 - 260 VAC 50/60Hz, 24VDC, 12VDC
---------------------	--------------------------------------

Specification :Environmental



Ambient Temperature Range	: 0 To 55 °C (For Integral Flow Meter)
Process Temperature Range	: 0 To 150 °C (For Integral Flow Meter)
Process Temperature Range	: 0 To 150 °C (For Remote Flow Meter)
Ambient Humidity Range	: 5 To 95 % Rh (Non-Condensing)

Specification : Physical

Weight	: As Per Line Size of Flow meter
Enclosure	: Aluminum Die cast, Weather Proof, Flame Proof
Protection	: IP67, IP68 (Optionally For Remote Version)
Dimension	: As Per Table

Application

Water and Waste Water Management
ETP Plant
Pharmaceutical Application
Power Industries
Cement Industries
Water Heating Boilers
Sewage Treatment Plant
Mining Industries
Paper and Pulp Industries
Food/Beverage Industries
Fertilizer Industries

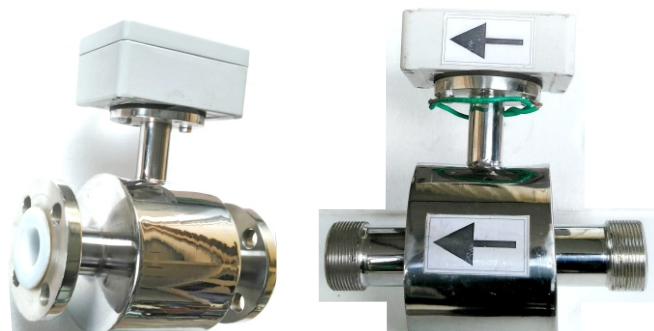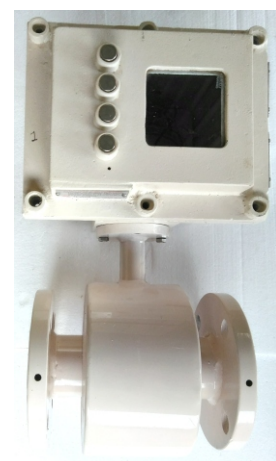

Ordering Code

ZT803-X XX X X X X X X X (10 Digit code)
Option 1: Display(X)

- 0 - Local (Integral Display)
- 1 - Remote Display (5 Meter Cable length)
- 2 - Remote Display (User Define Cable length)

Option 2: Line Size(XX)

- 00 - 015mm (1/2")
- 01 - 020mm (3/4")
- 02 - 025mm (1")
- 03 - 032mm (1 1/4")
- 04 - 040mm (1 1/2")
- 05 - 050mm (2")
- 06 - 065mm (2 1/2")
- 07 - 080mm (3")
- 08 - 100mm (4")
- 09 - 125mm (5")
- 10 - 150mm (6")
- 11 - 200mm (8")
- 12 - 250mm (10")
- 13 - 300mm (12")
- 14 - 350mm (14")
- 15 - 400mm (16")
- 16 - 450mm (18")
- 17 - 500mm (20")

Option 3: Power(X)

- 0 - 90-260VAC(Default)
- 1 - 24VDC
- 2 - 12VDC
- 3 - User Define

Option 4: Output(X)

- 0 - Rs485 and 4-20mA Retransmission(Default)
- 1 - 1 Relay on Flow rate
- 2 - 1 Relay on Totalizer
- 3 - 1 Relay on Flow rate and 1 Relay on Totalizer
- 4 - Pulse Output
- 5 - RS232
- 6 - Internal Data logging and Printing Function
- 7 - USB Output
- 8 - User Define

Option 5: Electrode Selection(X)

- 0 - 316L Stainless Steel(Default)
- 1 - Hastelloy C
- 2 - Tantalum
- 3 - Titanium
- 4 - User Define

Option 6: Connection Types(X)

- 0 - CS Flange(Default)
- 1 - SS316L Flange
- 2 - Threaded Type
- 3 - Tri clover Clamp
- 4 - User Define

Option 7: Connection Types(X)

- 0 - Weather Proof(Default)
- 1 - Flame proof Class II A, B

Option 8:(X)

- 0 - None


Option 9:(X)

- 0 - None


Flow Rate Characteristics Values

Nominal Diameter		Recommended Flow Rate Min./ Max. Full Scale Value
(mm)	(Inch)	(Velocity 0.3 to 10 m/s)
15	0.5"	06 - 120.00 LPM
20	3/4"	10 - 200.00 LPM
25	1"	10 - 300.00 LPM
32	1 1/4"	15 - 500.00 LPM
40	1.5"	25 - 700.00 LPM
50	2"	35 - 1100.0 LPM
65	2.5"	60 - 2000.0 LPM
80	3"	4 - 150.00 m3/Hr
100	4"	8 - 270.00 m3/Hr
125	5"	12 - 300.00 m3/Hr
150	6"	20 - 600.00 m3/Hr
200	8"	35 - 1100.0 m3/Hr
250	10"	55 - 1700.0 m3/Hr
300	12"	110 - 3300.0 m3/Hr
350	14"	140 - 4200.0 m3/Hr
400	16"	180 - 5400.0 m3/Hr
450	18"	220 - 6600.0 m3/Hr
500	20"	300 - 9600.0 m3/Hr


Dimensions

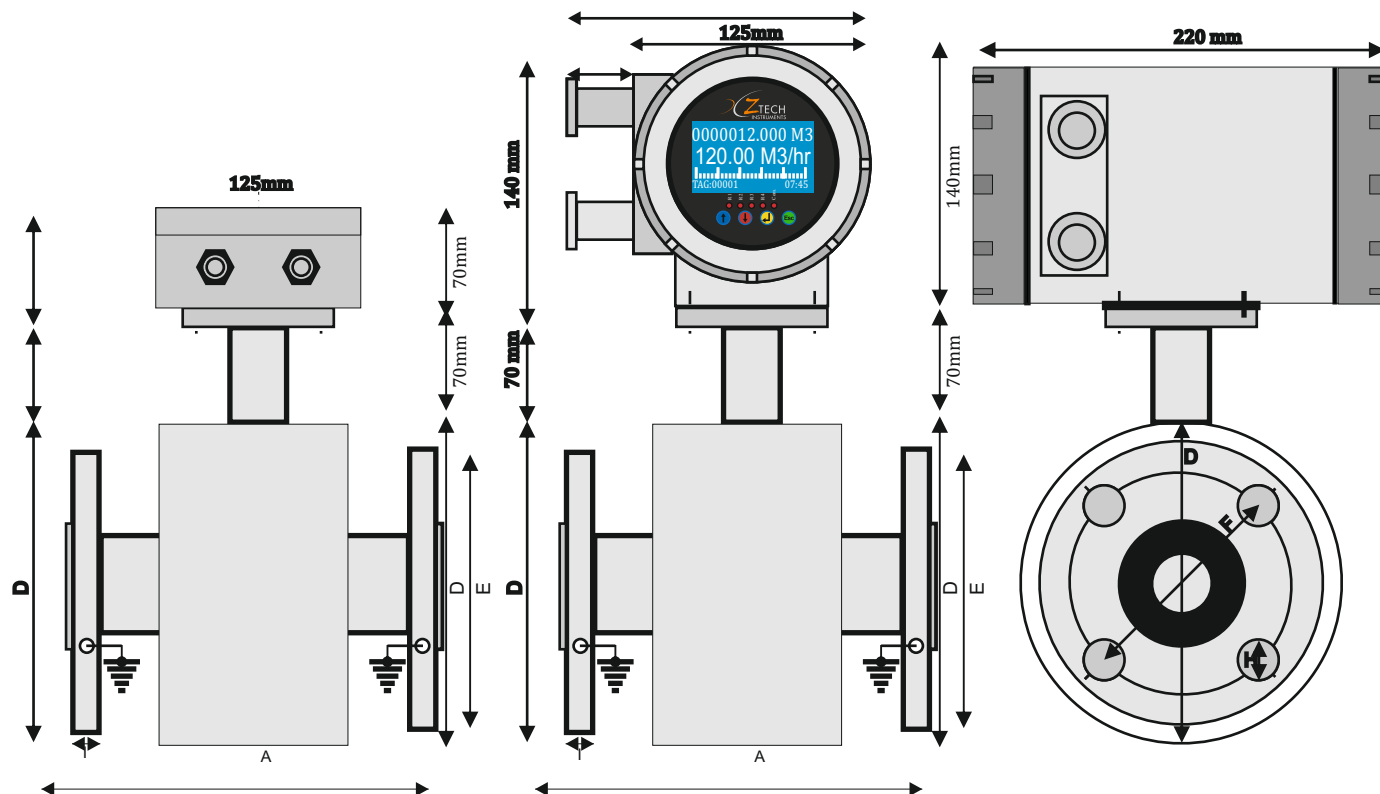


(mm)	(inch)	Face To Face distance	Height	Flange Diameter	Pitch Circle Diameter (PCD)	Dia. of Hole	Thickness	Number of Holes
		A	D	E	F	H	I	
15	1/2"	200	117	88.9	60.4	15.7	11.2	4
20	3/4"	200	126	98.6	69.9	15.7	12.7	4
25	1"	200	136	108.0	79.2	15.7	14.2	4
32	1 1/4"	200	145	117.3	88.9	15.7	15.7	4
40	1 1/2"	200	155	127.0	98.6	15.7	17.5	4
50	2"	200	180	152.4	120.7	19.1	19.1	4
65	2 1/2"	200	206	177.8	139.7	19.1	22.4	4
80	3"	200	218	190.5	152.4	19.1	23.9	4
100	4"	250	258	228.6	190.5	19.1	23.9	8
125	5"	250	282	254.0	215.9	22.4	23.9	8
150	6"	300	307	279.4	241.3	22.4	25.4	8
200	8"	350	372	342.9	298.5	22.4	28.4	8
250	10"	400	434	406.4	362.0	25.4	30.2	12
300	12"	450	511	482.6	431.8	25.4	31.8	12
350	14"	530*	570*	533.4	476.3	28.4	35.1	12
400	16"	610*	630*	596.9	539.8	28.4	36.6	16
450	18"	660*	670*	635.0	577.9	31.8	39.6	16
500	20"	750*	740*	698.5	635.0	31.8	42.9	20

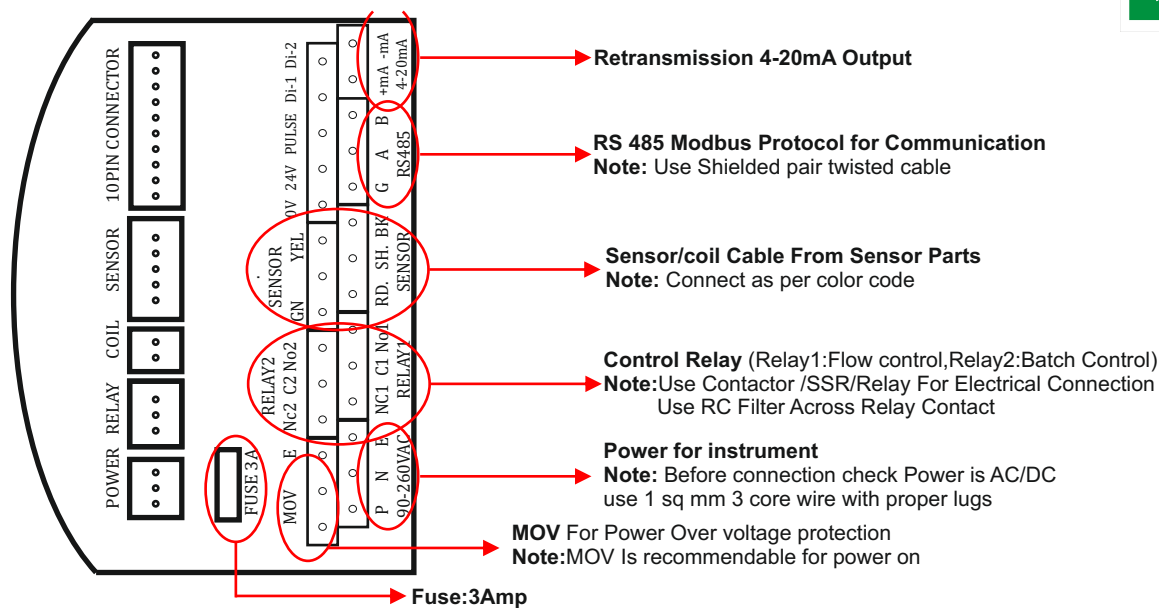

Electrical Connections

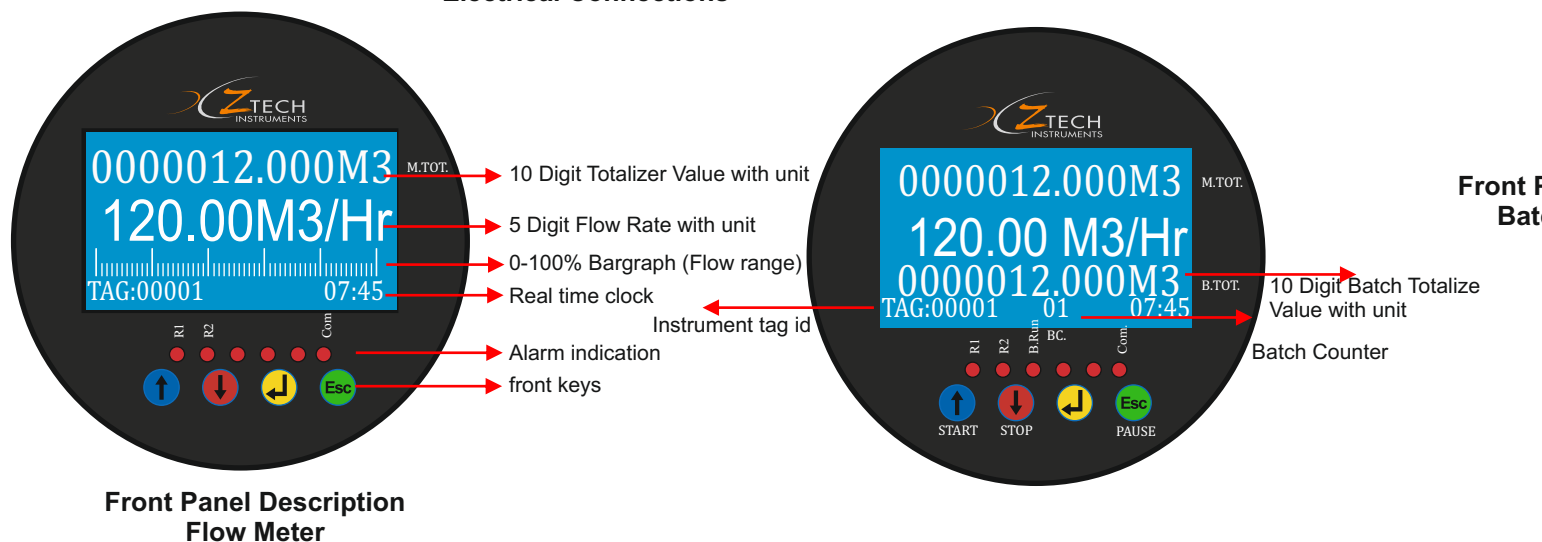

Installation Guideline

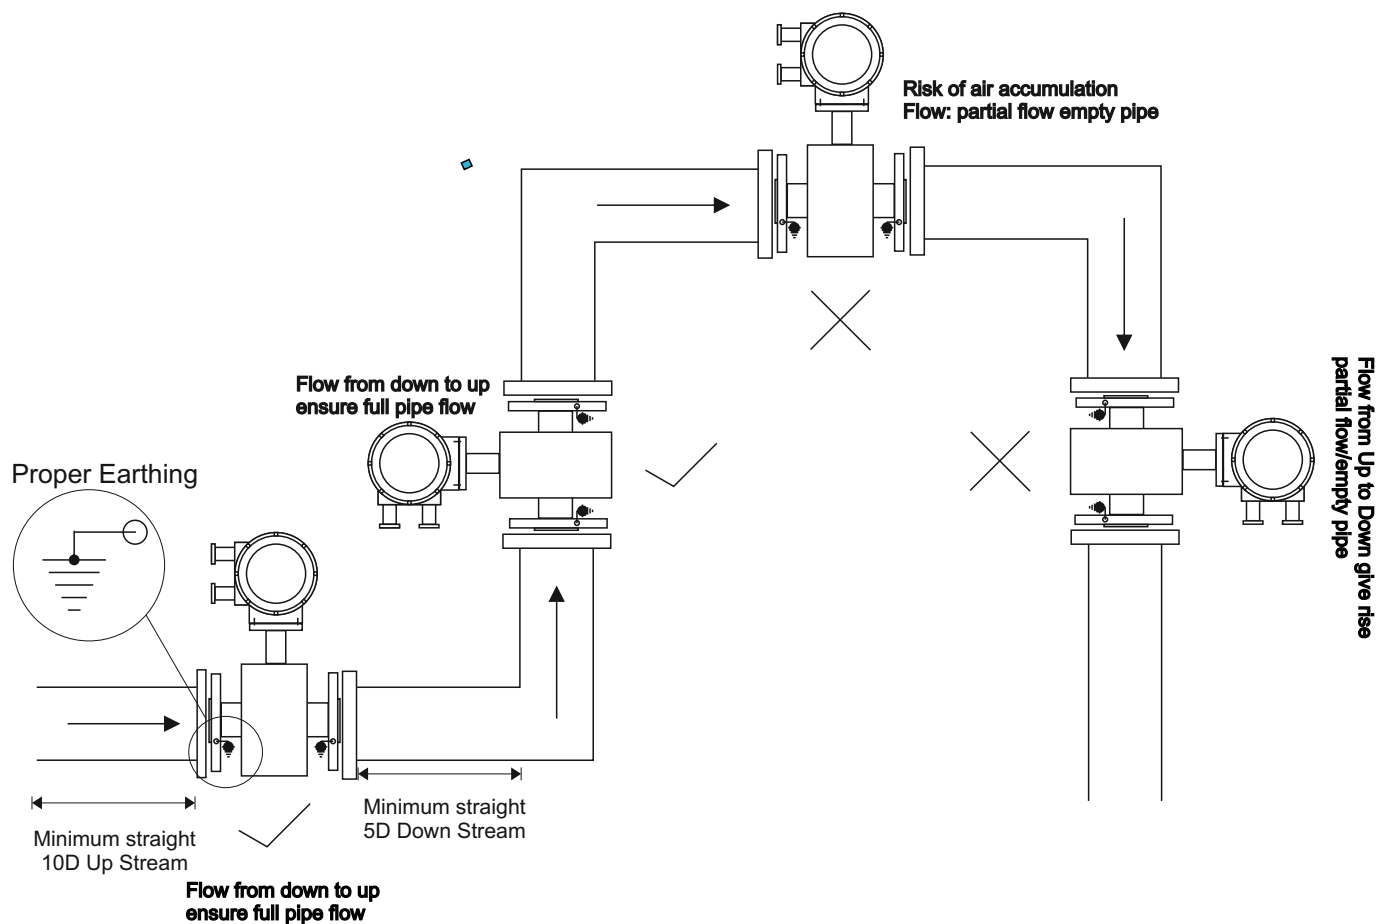

Flow Must be Full Bore

Strait Pipe: Up Stream(10 Pipe Diameter),Down Stream (5Pipe Diameter)

Install the Flow Meter Vertically or Incline With Flow from Down To Up As This Ensure That the Pipe Is Always Full

Proper Grounding/Farthing to Flanges is Compulsory

Use Proper Wire and Proper Glanding will avoid from External Environment Parameter like (Water, Dust, Gases)

For Communication use Shielded core twisted pair wire only

EXCEL ENVIRO TECH

TF-2 , SUN HOUSE,
NR. OLD HIGH COURT,
OFF. ASHRAM ROAD,
AHMEDABAD-380009

EMAIL ID: SALES@EXCELENVIRO.COM,

CONTACT NO: 9825588910,9825729124